

A3 Size Gel Scanner

with Leak-Free Removable Glass Holders



IEF Gel

Designed Leak-Free Removable Glass Holder

Bio-6000T is equipped with a specially designed leak-free glass holder that can be easily removed out for cleaning and washing under water tap. The available holder sizes are 11 x 11 cm, 24 x 24 cm, and 12" x 16". Scientists can capture images directly from gel surface handily no matter the samples are dry or wet. It saves a lot of time, 1-2 days at least, to continue the lab projects without waiting samples being dried.




Holder Size: 11 x 11 cm (2 sets) > 24 x 24 cm. > 12" x 16"

Fields of application and application examples

Electrophoresis gels stained with Coomassie blue staining, or autoradiography. i.e. silver-stained SDS PAGE, etc.

High image quality with 3200-dpi resolution, 48-bit color, 0.05D~3.77D

The images are amazingly crystal-clear for the bright area. There is no need to worry about contrast or light reflection problems, the scanner presents the consistent image with the original sample.




General Scanner

Microtek Bio-6000T


Bio-60007)


- Designed Leak-Free Glass Holders can be removed and clean-up easily
- Leak-free large scan bed, and shield can avoid liquid penetration
- No warm up time with energy-saving LED light source
- 5 seconds per gel scanning (10 x 10 cm)
- 0.05D ~ 3.77D optical density
- 3200 dpi optical resolution (7.9 µm spot size, 63 lp/mm)
- Smart-Touch button quickly captures images
- · Make batch scanning easily
- Deliver accurate images no matter the scanned target is dry or wet gel sample



Powerful Software Features

Along with MiBio, it implements many biological image analysis features with a user-friendly surface (Windows only). The utility provides added valuable turnkey solution. Microtek's Bio-6000T is also compatible with all advanced image analysis software packages for 1D and 2D gel electrophoresis.

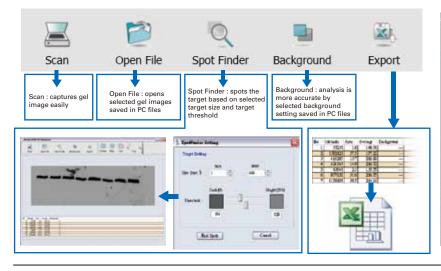



Specifications

Product Type: Flatbed Scanner

Image Sensor: CCD Scanning Area

Reflective 11.6" x 16.9" (294.6 mm x 429.3 mm) Transparent:

11.6" x 16" (294.6 mm x 406.4 mm) Scanning Speed:

4.9 sec. / 10 x 10 cm @300 dpi

11.7 sec. / 24 x 24 cm @300 dpi 19.57 sec. / 11.6" x 16"@300 dpi Bit Depth: 48-bit

Resolution

Optical: 3200 dpi (7.9 µm spot size, 63 lp/mm) Hardware: Up to 3200 x 6400 dpi

Default: 300 dpi

Optical Density: 0.05D ~ 3.77D, 3.77 Dmax

Dimensions (LxWxH):

24.7" x 14.8" x 7.3" (627.3 x 375.9 x 185.4 mm) Weight: 35.4 lbs. (16.1 kg.)

Connectivity: Hi-Speed USB (USB 2.0)

Power Supply: AC 100V-240 V, 47-63 Hz

Power Consumption: 54.9 Watts

Environment

Operating Temperature: 50° to 104°F (10° to 40°C) Relative Humidity: 20% to 85%

Leak-Free Glass Holders:

11 x 11 cm (2x) > 24 x 24 cm > 12" x 16"

System Requirements

• CD-ROM drive (for installing software)

Color display with 24-bit color output capability
512 MB RAM or more (1 GB recommended)

• Pentium IV PC or higher with USB 2.0 port

 300 MB or more hard disk space available • Windows 7 / 8 (compatible with XP / Vista)

Included Software

- Microtek® ScanWizard™ Bio
- Microtek® MiBio
 InterVideo MediaOne Gallery
- ABBYY FineReader® Sprint OCR
 Adobe® Photoshop Elements
- Adobe® Acrobat® Reader

For more details on product, please contact your local Microtek sales or dealers.















No. 6 Industry East Road 3, Science-Based Industrial Park, Hsinchu 300, Taiwan Tel: +886-3-577-2155 Fax: +886-3-577-2598 http://www.microtek.com

